Ìròyìn ìṣírò ẹrọ iná

Analytical Überprüfung — Àyẹ̀wò Yorùbá

Àtúnṣe iṣẹ́: 1 · Ẹ̀dà èrọ ìṣírò: 1.1.0 · Ẹ̀dà dátà: 1
Àkókò ìwọlé: 2026-11-06T01:23:28.668Z · Àgbègbè àkókò: Europe/Berlin
Àgbègbè òfin / àlà: User-entered design criteria
Reference: QA-REPORT
Analytical verification fixture only
No real customer data
2026-11-06T01:23:28.677Z · project-01c23fd7-58b8-4182-8616-4cb48c5fd956
Entered analytical inputs; no installation certification.

Ìṣírò ètò láti ìwọlé. A kò sọ pé a ti ṣe àyẹ̀wò ojú iṣẹ́, ìfọwọ́sí tàbí àṣẹ olùpèsè.


Àkótán ìṣírò

Àkótán ìṣírò	
Agbára tí a fi sílẹ̀	3 kW
Agbára nígbà iṣẹ́	3 kW
Agbára ìṣètò	3 kW
Agbára hàn àpapọ̀	3 kVA
Ìpín agbára	1
Ìṣírò agbára ojoojúmọ́	72 kWh
Ìṣírò owó iná ojoojúmọ́	€21.60
Òkè agbára àtòjọ	3 kW
Ìṣàn nùtràlì ìpilẹ̀	13.043 A
Àìdọ́gba ìṣàn	200 %

Àwọn ìwọlé fún ìṣírò tó wà ti pé.

Fésì	Ìṣàn iná	Ní iṣẹ́ A
L1	13.043 A	13.043 A
L2	0 A	0 A
L3	0 A	0 A

Àtòjọ ọjọ́ àpẹẹrẹ láti àkókò iṣẹ́ tí a tẹ sílẹ̀

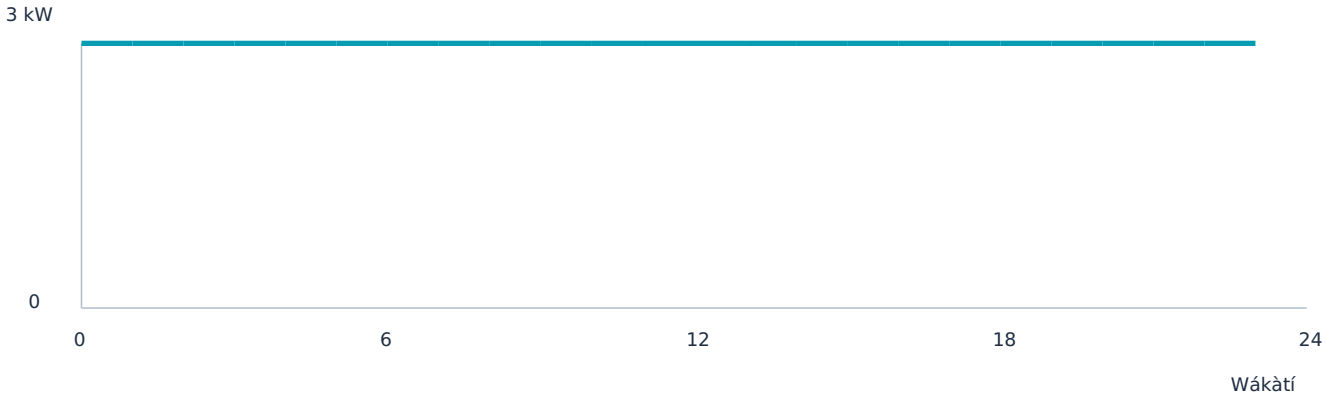

Ọnà àti èrí

Stiff-neutral sinusoidal AC and separate DC branch model

P = VI·PF (1φ); P = √3·VLL·I·PF (3φ); Q = ±P tan(acos PF); S = √((ΣP)² + (ΣQ)²); E = ΣP·Δt

calculated · passed · Àtúnṣe iṣẹ́ 1

Àwọn àfojúsùn

• Balanced supply voltages; fixed neutral; fundamental-frequency currents only.
• Duty affects energy, never on-state current. Utilization is an explicit operating assumption.
• Coincidence and growth affect design demand; they do not alter modeled energy.
• Quick estimates use one repeated 24-hour day and 30 days per month; weekday calendars and DST require calendar simulation.
• Flat-rate cost inputs are user assumptions. No normative cable/protection approval is implied.
• L–L branches contribute equal/opposite line currents; neutral excludes DC branches.

Àwọn ìtọ́kasí orísun

Project entered/nameplate evidence

https://www.electrical-installation.org/enwiki/Estimation_of_actual_maximum_kVA_demand

Ẹ̀rí ohun èlò

=Analytical heater: user — User-entered input; verify against equipment data.

Board and phase summary

Pánẹ́lì	Parent	Rating (A)	Used / ways	Feeder (m)
Main board	Source	63	1 / 12	20

Board and phase values describe the entered model. Missing cable and device evidence remains unresolved.

Cable, protection and feeder checks

Entered circuit

Design current: 13.043 A · Àtúnṣe 1

Check	Assessment	Value / limit	Method and evidence
Corrected conductor capacity	kò tîì pé	Not available / Not available	Tẹ a sourced base ampacity and every applicable correction factor. Use an explicit factor of 1 when no derating applies sílẹ̀.
Device rating coordination	kò tîì pé	Not available / Not available	A valid load current, protective-device current and sourced corrected cable ampacity are required.
Operating characteristic / disconnection	kò tîì pé	Not available / Not available	Record the applicable device curve, conventional operating current, earthing arrangement and disconnection criterion. A current rating alone cannot establish this check.
Circuit voltage drop	kò tîì pé	Not available / Not available	Tẹ route length and per-conductor resistance, and use compatible AC load connections. The standalone DC loop worksheet accepts complete loop resistance sílẹ̀.
Breaking capacity	kò tîì pé	Not available / Not available	Tẹ verified prospective fault current and the device breaking capacity at the applicable voltage sílẹ̀.

Source-to-load route assessment

Endpoint	Drop (V)	Drop (%)	Receiving (V)	Loss (W)	Assessment
=Analytical heater	Not available	Not available	Not available	Not available	kò tîì pé

Nominal-current radial phasor model. A missing upstream segment makes the route total unavailable; it is not treated as zero.

Motor starts and supply capacity

No timestamped start events were entered. Motor-start sequence results are unavailable.
Starting-event values use entered current multipliers and starting power factors. They do not predict electromagnetic transients or generator voltage/frequency dips.

Energy, tariffs and carbon

Iye	Entered value / estimate
Owó wọlé	0.3 EUR/kWh
Owó jáde	0 EUR/kWh
Owó ìdúró	0 EUR/day
Owó agbára gíga	0 EUR/kW

Iye	Entered value / estimate
Owó orí	0 %
Operational carbon factor	Not available kg CO_2e/kWh
Daily carbon estimate	Not available

Editable planning assumption; not a retrieved tariff.
No completed calendar simulation was supplied. Daily values are representative estimates, not a calendar bill.

Renewables and storage evidence

Iye	Entered value
Agbára oòrùn	0 kW
Wákàtí oòrùn	4
PV performance ratio	0.8
Agbára bátìrì	0 kWh
Initial / minimum / maximum SOC	0.5 / 0.2 / 0.95
Charge / discharge power	0 / 0 kW
Charge / discharge efficiency	0.95 / 0.95
Entered island capability	No

User-entered planning assumptions; no weather service connected.
No completed chronological dispatch was supplied. Installed capacity alone does not establish import, export or outage service.

Charging requirements and feasibility

No completed charging plan was supplied. Entered requirements are not evidence of delivered energy.

Scenario comparison

Project / revision	Design kW	Daily kWh	Owó ọjọ́	Energy difference	Ìṣòro
Analytical Überprüfung — Àyẹ̀wò Yorùbá · 1	3	72	21.6 EUR	0	0

No comparison snapshot was supplied. Open or select a saved scenario before exporting a comparison. Differences use the first listed project as the reference. Each scenario retains its own revision and entered assumptions.

Model-derived bill of materials

Item	Qty	Unit	Source IDs	Evidence
=Analytical heater	3	piece	load-bda086cb-4172-4ac5-8bfd-0f82a367b306	User-entered input; verify against equipment data.
Main board · 63 A · 12 ways	1	piece	board-bc7b561f-e358-49df-8d6f-651f77f0bcb0	Entered board model; verify actual equipment specification.
Main board — feeder cable	20	m	board-bc7b561f-e358-49df-8d6f-651f77f0bcb0	Explicit analytical feeder data
Entered circuit — protective device · 16 A	1	piece	circuit-f2778e76-bdf0-4c66-97b6-abe40b3be637	Entered protective rating; device model and manufacturer approval are not inferred.
Entered circuit — cable · 2.5 mm²	12.5	m	circuit-f2778e76-bdf0-4c66-97b6-abe40b3be637	Explicit measured route fixture

Cable quantities are entered one-way route lengths. Conductor count, offcuts, waste and procurement packaging require explicit review.

Measurement provenance

No validated saved measurement dataset was supplied.
Observed totals cover supplied intervals only. Missing intervals are not filled with assumed measurements.

Time-series evidence

Representative daily profile; not timestamped measurement data. Export the complete machine-readable series alongside this report.

Model hour	Average kW	Interval kWh
0	3	3
1	3	3
2	3	3
3	3	3
4	3	3
5	3	3
6	3	3
7	3	3
8	3	3

Model hour	Average kW	Interval kWh
9	3	3
10	3	3
11	3	3
12	3	3
13	3	3
14	3	3
15	3	3
16	3	3
17	3	3
18	3	3
19	3	3
20	3	3
21	3	3
22	3	3
23	3	3

AdigunPowerLab · Single-line diagram

Analytical Überprüfung — Àyẹ̀wò Yorùbá

Àtúnṣe 1 · Tile 1/1 × 1/3 · Entered topology; not installation certification




Overlapping vector tiles preserve readable labels. Full connection details and notes follow.

AdigunPowerLab · Single-line diagram

Analytical Überprüfung — Àyẹ̀wò Yorùbá

Àtúnṣe 1 · Tile 1/1 × 2/3 · Entered topology; not installation certification

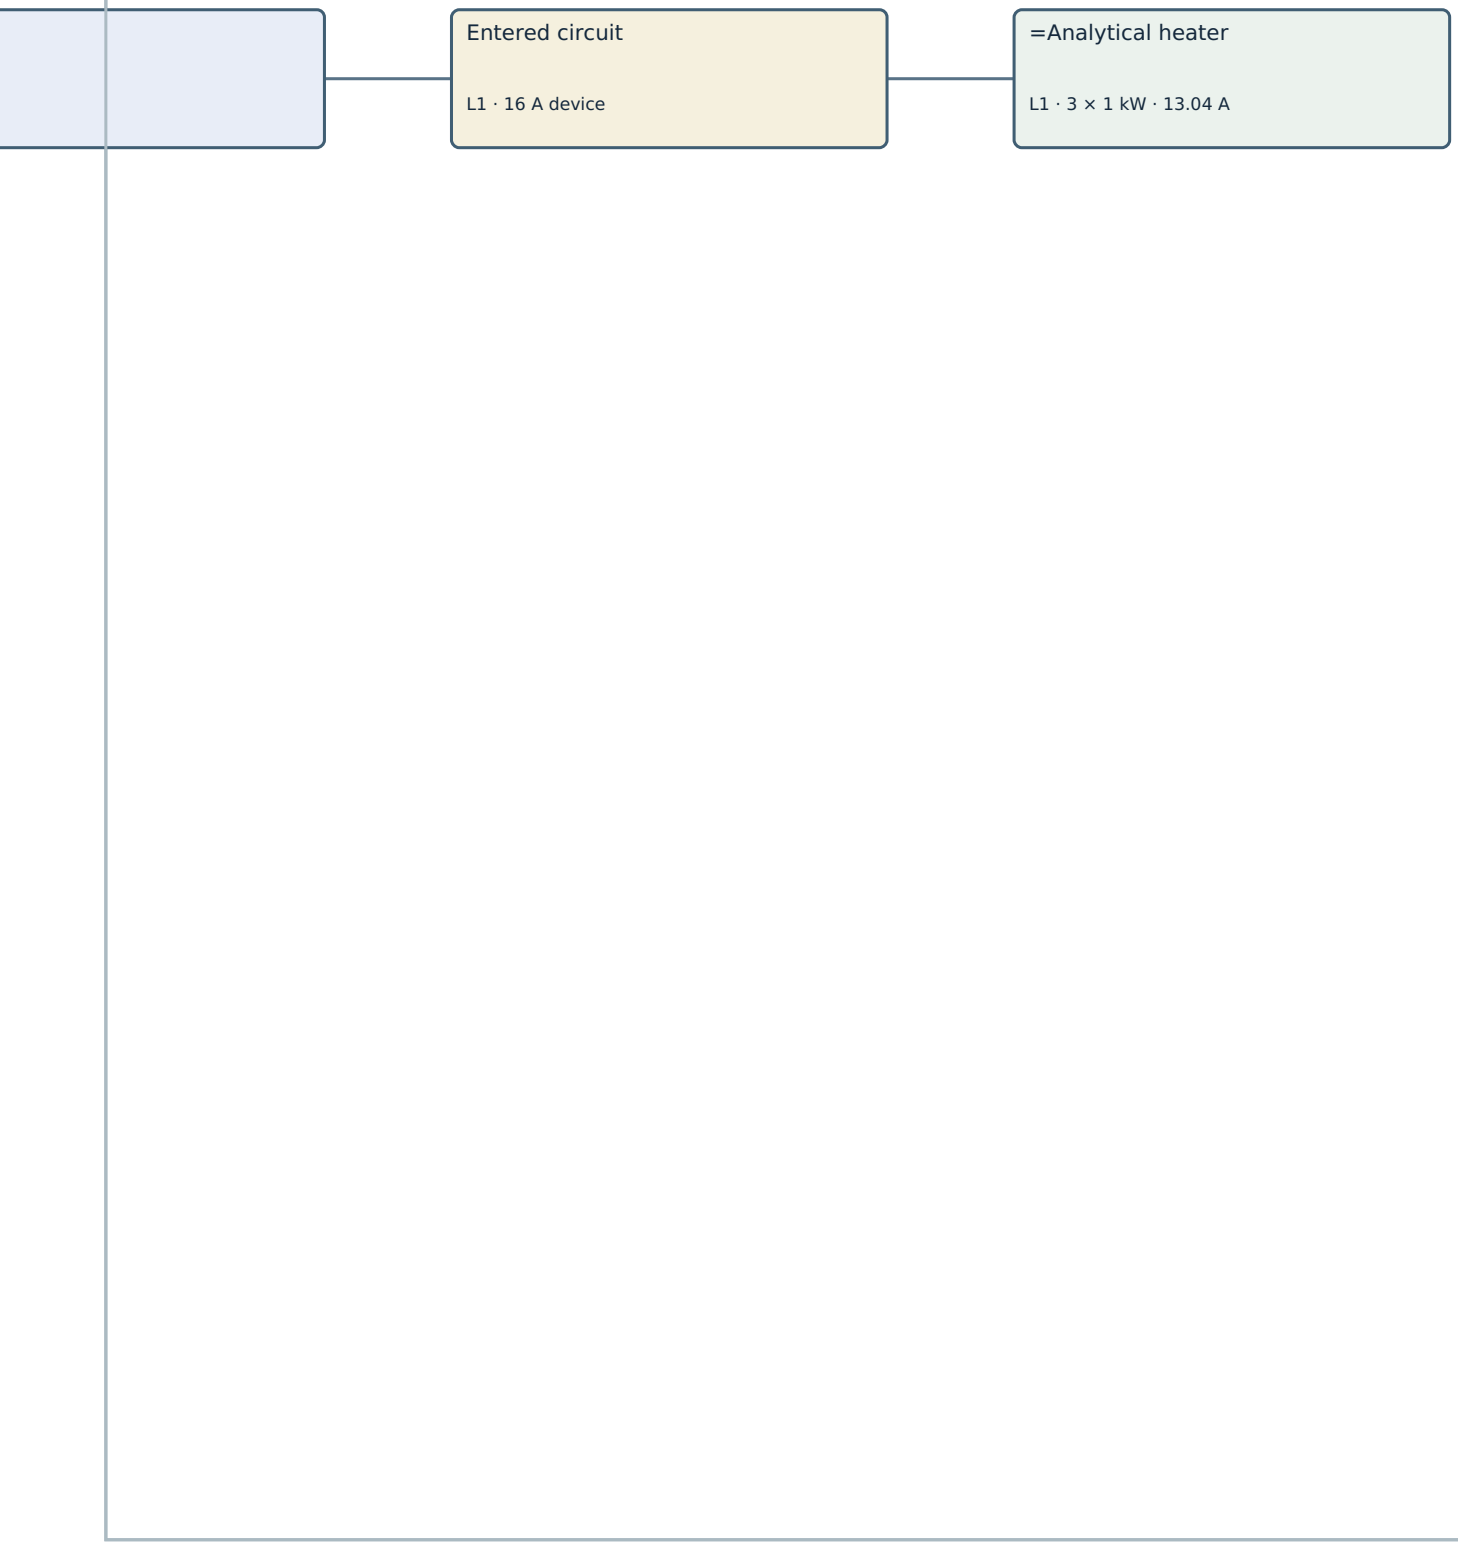


Overlapping vector tiles preserve readable labels. Full connection details and notes follow.

AdigunPowerLab · Single-line diagram

Analytical Überprüfung — Àyẹ̀wò Yorùbá

Àtúnṣe 1 · Tile 1/1 × 3/3 · Entered topology; not installation certification



Overlapping vector tiles preserve readable labels. Full connection details and notes follow.

Diagram legend & source details

Source → distribution board → circuit → load. Lines represent modeled electrical relationships; they do not measure cable length.

source:project-01c23fd7-58b8-4182-8616-4cb48c5fd956 · source · Grid / supply · 230/400 V · 50 Hz · 63 A

board:board-bc7b561f-e358-49df-8d6f-651f77f0bcb0 · board · Main board · 63 A · 1/12 ways

circuit:circuit-f2778e76-bdf0-4c66-97b6-abe40b3be637 · circuit · Entered circuit · L1 · 16 A device

load:load-bda086cb-4172-4ac5-8bfd-0f82a367b306 · load · =Analytical heater · L1 · 3 × 1 kW · 13.04 A

source:project-01c23fd7-58b8-4182-8616-4cb48c5fd956 → board:board-bc7b561f-e358-49df-8d6f-651f77f0bcb0: 20 m feeder

board:board-bc7b561f-e358-49df-8d6f-651f77f0bcb0 → circuit:circuit-f2778e76-bdf0-4c66-97b6-abe40b3be637: 12.5 m · 2.5 mm²

circuit:circuit-f2778e76-bdf0-4c66-97b6-abe40b3be637 → load:load-bda086cb-4172-4ac5-8bfd-0f82a367b306: Connected load